



TriStar®

STANDARD EFFICIENT, MAX-RATED,
HIGH-PERFORMANCE PUMP SERIES

PUMPS



TriStar is the most hydraulically efficient pool pump that provides superior flow and energy efficiency. Easy to install, service and maintain, TriStar outperforms the competition when it comes to flow, efficiency, and value. A super-sized, no-rib basket with extra leaf-holding capacity is a snap to clean. And a variety of bases, TriStar seamlessly retrofits to existing systems. Whether for new construction or aftermarket installations, TriStar is the superior choice.



No-rib basket design ensures easy debris removal. Extra leaf-holding-capacity basket extends time between cleanings.

Crystal clear strainer cover lets you see when the basket needs cleaning.

Heavy-duty, high performance motor with dynamic airflow delivers cooler operation

Tri-Lock cam and ramp strainer cover seals with less than a 1/4 turn

Service-ease design: power-end assembly (motor/impeller/diffuser) can be removed without disturbing plumbing or mounting connections, simply by removing six bolts


2" x 2 1/2" CPVC union connections makes installation and servicing fast and easy

Second base included, aligns with STA-RITE® MAX-E-PRO™, MAX-E-GLAS®, DURA-GLAS® and DURA-GLAS II® plumbing for easy retrofit



Additional TriStar® Features & Benefits

- Advanced fluid dynamic design delivers superior flow, energy efficiency and value
- Higher flow rates allow for stepping down in pump horsepower for even less cost and energy consumption.
- Pressure testable to 50 PSI maximum.
- Self-priming (suction lift up to 10' above water level)

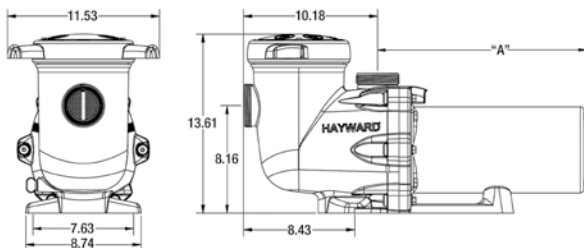


TriStar Max-Rated Pumps are listed by:



MAX RATE MODELS	TOTAL HP	MAX RATE HP	SERVICE FACTOR	VOLTAGE	PIPE SIZE	DIMENSION "A"
SP3205X7	0.94	0.75	1.25	115/230	2 / 2 1/2"	13" 3/8"
SP3207X10	1.25	1	1.25	115/230	2 / 2 1/2"	13 7/8"
SP3210X15	1.65	1.5	1.10	115/230	2 / 2 1/2"	13 7/8"
SP3215X20	2.20	2	1.10	115/230	2 / 2 1/2"	15 1/8"
SP3220X25	2.60	2.5	1.04	230	2 / 2 1/2"	14 7/8"
SP3225X30	3.45	3	1.15	230	2 / 2 1/2"	15 5/8"
DUAL-SPEED MAX RATE MODELS	TOTAL HP	MAX RATE HP	SERVICE FACTOR	VOLTAGE	PIPE SIZE	DIMENSION "A"
SP3210X152	1.85	1.5	1.73	230	2 / 2 1/2"	14 3/8"
SP3215X202	2.40	2	1.20	230	2 / 2 1/2"	14 7/8"
SP3220X252	2.70	2.5	1.08	230	2 / 2 1/2"	14 7/8"

TriStar Standard Efficient Flow vs. Total Head

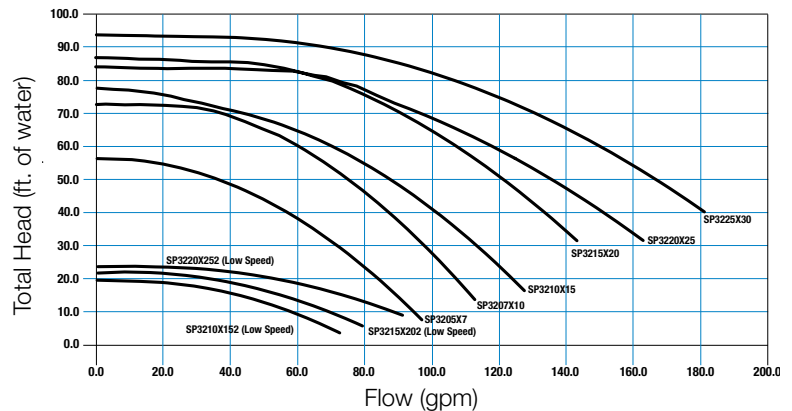

To take a closer look at Hayward Pumps, go to www.haywardnet.com or call 1-888-HAYWARD



620 Division Street | Elizabeth, NJ 07201