

Mini-Craft of Florida, Inc.

900 Industrial Drive * Wildwood, FL. 34785

(352)748-5200* (800)282-8244

Fax: (352) 748-5338 * Web: www.minicraft.com



**McKote
Professional
Grade
Gelcoats**

**PATCH
BOOSTER**

Disclaimer and Limitation of Liability

The information contained in this data sheet has been developed through the application of accepted laboratory practice and is believed to be reliable. Since the conditions of application and use of our products are beyond our control, no warranty or representation is expressed or implied regarding accuracy of the information, the results to be obtained from the use of the product, or that such use will not infringe on any patent. The information is furnished with the express conditions that the user will evaluate it through testing and determine the suitability of the product. Mini-Craft of Florida, Inc. will not be liable for any injury or damage arising from the application of this information.

MINI-CRAFT'S WARRANTY IS SET FORTH IN PARAGRAPH 5 OF ITS STANDARD TERMS & CONDITION OF SALE AND IS LIMITED TO PRODUCT REPLACEMENT OR PURCHASE PRICE REFUND. MINI-CRAFT OF FLORIDA, INC. DISCLAIMS ANY WARRANTY OF MERCHANTABILITY OF WARRANTY OF FITNESS FOR A PARTICULAR USE.


Mini-Craft of Florida, Inc.

(ADV)MC385

PATCH BOOSTER

Advantages:

- * Faster cure
- * Harder patch
- * Better gloss
- * Consistent cold weather performance
- * Better color match
- * Less halo
- * Better long term weatherability of patch

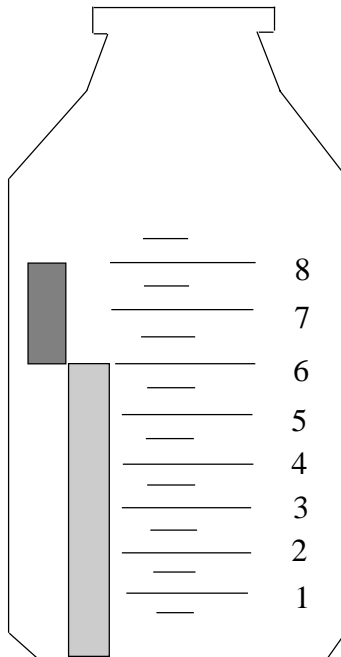

Patch Booster is a supplemental additive to accelerate and improve the quality of sprayed gelcoat used in patching.

Patch Booster, if used in the recommended concentration, eliminates the need to thin or side promote prior to patching.

PREPARATION

- * Mix Patch Booster well
- * The recommended ration mix is 2 parts of booster to 6 parts of Gelcoat. To this mix add 1.5% to 2% M.E.K.P., mix and spray.
- *The *acceptable* method for measuring small quantities of M.E.K.P. is with a syringe.
- * Even a thin sprayed layer will be ready to sand in approximately one hour and hard enough to buff soon after.
- * Care must be taken not to over or under catalyze. This may affect the color.
- * Working time is approximately 20 minutes.



Warning! Use Booster within 30 days of purchase. Material is accelerated and has limited shelf life. Refer to the Material Safety Data Sheet for more information.
