1109-6

### COMMANDER Omni Fiberglass Antenna, 895-960, 10.1 dBi, N Female

Please visit us on the internet at <u>http://www.commandertech.com</u>

### **Product Description**

These center-fed collinear antennas ensure consistent gain and impedance across the operating frequency band and are specifically designed to meet various omnidirectional requirements for mobile radio services in the 806-960 MHz bands. Copper alloy radiating elements are encased in a weatherproof fiberglass low loss housing and permanently attached to a 6061-T6 aluminum support pipe.

1109 SERIES

#### Features/Benefits

- Fiberglass construction protects radiating elements in hostile environments - Copper radiating elements minimize possible generation of intermod products - Center-fed design eliminates beamswing across the band

| Technical Specifications                                    |                                       |  |  |
|---|---------------------------------------|--|--|
| Frequency Band  | 872-960 MHz, 896-940 MHz, 901-941 MHz |  |  |
| Horizontal Pattern  | Omni Directional                      |  |  |
| Antenna Type  | Fiberglass Omni                       |  |  |
| Electrical Down Tilt Option                                 | Fixed                                 |  |  |
| Gain, dBi (dBd)   | 10.1 (8)                              |  |  |
| Frequency Range, MHz  | 895-960                               |  |  |
| Connector Type  | N Female                              |  |  |
| Connector Location  | Bottom                                |  |  |
| Mounting Type   | Fixed                                 |  |  |
| Electrical Down Tilt, deg                                   | 0                                     |  |  |
| Orientation   | Upright                               |  |  |
| Mounting Hardware   | 46 Clamp Set                          |  |  |
| Rated Wind Speed, km/h (mph)                                | 160 (100)                             |  |  |
| Gain (Omni), dBi (dBd)                                      | 10.14 (8)                             |  |  |
| VSWR  | < 1.5 : 1                             |  |  |
| Vertical Beamwidth, deg                                     | 8                                     |  |  |
| Polarization  | Vertical                              |  |  |
| Maximum Power Input, W                                      | 500                                   |  |  |
| Lightning Protection  | Direct Ground                         |  |  |
| Flexible Extensions   | Optional                              |  |  |
| Impedance, Ohms   | 50                                    |  |  |
| Overall Length, m (ft)                                      | 2.89 (9.47)                           |  |  |
| Element Housing Length, m (ft)                              | 2.28 (7.47)                           |  |  |
| Mounting Pipe Diameter, m (in)                              | 0.07 (2.75)                           |  |  |
| Support Pipe Length, m (ft)                                 | 0.61 (2)                              |  |  |
| Weight, kg (lb)   | 8 (16)                                |  |  |
| Radiating Element Material                                  | Copper                                |  |  |
| Element Housing Material                                    | Fiberglass                            |  |  |
| Support Pipe Material                                       | Aluminum Alloy                        |  |  |
| Max Wind Loading Area m <sup>2</sup> (ft <sup>2</sup> )     | 0.121 (1.3)                           |  |  |
| Survival Wind Speed, km/h (mph)                             | 200 (125)                             |  |  |
| Bend Mom @ Rated Wind 1" Below Pop of Mt Pipe, N m (ft lbf) | 269 (198.6)                           |  |  |
| Wind Load - Side @ Rated Wind, N (lbf)                      | 231 (52)                              |  |  |
| Shipping Weight, kg (lb)                                    | 20.4 (45)                             |  |  |
| Packing Dimensions, HxWxD mm (in)                           | 3505.2 x 101.6 x 101.6 (138 x 4 x 4)  |  |  |
| Shipping Mode   | Common Carrier                        |  |  |
|   |                                       |  |  |

#### Notes

Print Date:




1109-6

# COMMANDER Omni Fiberglass Antenna, 895-960, 10.1 dBi, N Female

Please visit us on the internet at http://www.commandertech.com

# **Other Documentation**

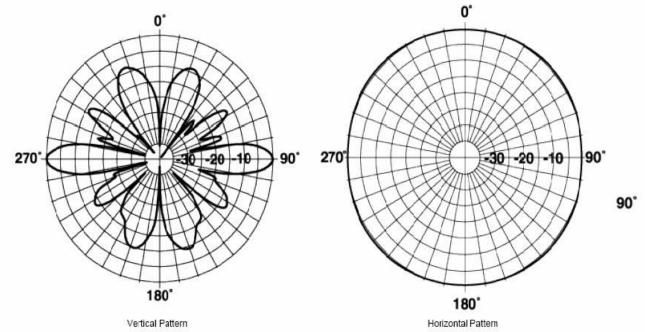

All information contained in this datasheet is subject to confirmation at time of ordering

COMMANDER

TECHNOLOGIES

| COMMANDER Model 1109-6 | REV: 1.0 | Print Date: | 6/11/2012 |
|------------------------|----------|-------------|-----------|