1142-2BN

COMMANDER Omni Fiberglass Antenna, 35-42, 2.1 dBi, N Female

Please visit us on the internet at http://www.commandertech.com

Product Description

The 1142 is a narrow band unity gain antenna built to a specific spot frequency requirement to effectively reduce interference from other near frequency transmitters. Of rugged, two-piece construction, the antenna's lower section is enclosed in heavy-wall fiberglass tubing. The upper whip is fiberglass and attaches in the field with a protected 1/2" x 20 threaded connector. This unit provides the advantages of DC ground lightning protection, versatility, installation ease and requires no ground plane elements to decouple from the support structure

1142 Series

COMMANDER

TECHNOLOGIES

Features/Benefits

Rugged construction assures system reliability High selectivity limits interference from bearby systems

<u> </u>			
Technical Specifications			
Frequency Band	25-299.9 MHz		
Horizontal Pattern	Omni Directional		
Antenna Type	Fiberglass Omni		
Electrical Down Tilt Option	Fixed		
Gain, dBi (dBd)	2.1 (0)		
Frequency Range, MHz	35-42		
Connector Type	N Female		
Connector Location	Bottom		
Mounting Type	Fixed		
Electrical Down Tilt, deg	0		
Orientation	N/A		
Mounting Hardware	46 Clamp Set		
Rated Wind Speed, km/h (mph)	160 (100)		
Gain (Omni), dBi (dBd)	2.14 (0)		
VSWR	< 1.5 : 1		
Vertical Beamwidth, deg	75		
Polarization	Vertical		
Maximum Power Input, W	250		
Lightning Protection	Direct Ground		
3rd Order IMP @ 2 x 43 dBm, dBc	N/A		
Impedance, Ohms	50		
Overall Length, m (ft)	4.27 (14)		
Element Housing Length, m (ft)	3.96 (13)		
Mounting Pipe Diameter, m (in)	0.04 (1.66)		
Support Pipe Length, m (ft)	0.3 (1)		
Weight, kg (lb)	5 (10)		
Radiating Element Material	Copper Alloy		
Element Housing Material	Fiberglass		
Support Pipe Material	6061 - T6 Aluminum		
Max Wind Loading Area m ² (ft ²)	0.066 (0.71)		
Survival Wind Speed, km/h (mph)	200 (125)		
Bend Mom @ Rated Wind 1" Below Top of Mt Pipe, N m (ft lbf)	250 (184)		
Wind Load - Side @ Rated Wind, N (lbf)	124 (28)		
Shipping Weight, kg (lb)	10.9 (24)		
Packing Dimensions, HxWxD mm (in)	3600 x 100 x 100 (141.73 X 3.94 X 3.94)		
Packing Dimensions, HxWxD, m (ft)	3.6 x 0.1 x 0.1 (11.8 x 0.33 x 0.33)		
Shipping Dimensions of Accessory, HxWxD, m (ft)	0.5 x 0.10 x 0.10 (1.8 x 0.33 x 0.33)		
Shipping Mode	UPS		
Notes			
Specify Center Frequency			

Specify Center Frequency


REV: 1.0



1142-2BN



Other Documentation

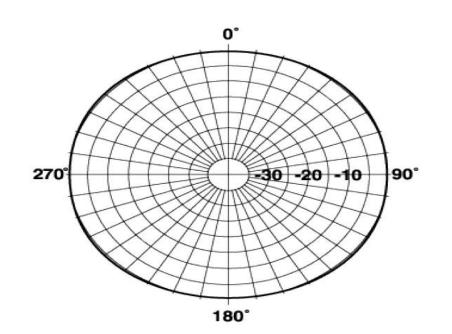

COMMANDER Model 1142-2BN REV: 1.0 Print Date: 1/6/2012			
	COMMANDER Model 1142-2BN	Print Date:	1/6/2012

